

Toshiba International Corporation Uninterruptible Power Systems




1000 Series 3000VA 120V Rackmount 2U - UT1A1A030C6RKB2
3000VA 120V/120V Rackmount 2U. The 2U Rackmount has all the great standard features with battery cabinet additions for a longer run-time.

Product Specifications

INPUT	Voltage	120Vac
	Voltage Range	80V~144V (+20% to -33%)
	Frequency	50/60 Hz Auto Sensing
	Synchronization window	± 3Hz
	Power Factor	Greater than 0.97
	THD Current	Less than 9% at Full Load
	Topology	True On-Line, Double Conversion, Input PF Correction
OUTPUT	Voltage	100/110/115/120/127Vac
	Capacity (VA)	3000VA
	Capacity (W)	2100W
	Voltage Regulation	± 2%
	Voltage Distortion	Less than 5% THD at Full Non-Linear Load. Less than 3% THD at full Linear Load.
	Step Load	± 9 % max from 100% to 20 % or from 20% to 100 % linear load
	Rated Current	16.7A
	Overload Capacity	125% for 1 minute, 150% for 10 seconds
	Crest Factor	3.0 at full load
	Frequency	50/60 Hz Auto Sensing
	Frequency Regulation	± 0.25Hz
	Wave Form	Sine wave, Zero Transfer Time
	Load Power Factor	0.7
Efficiency AC to AC	Greater than 86%	

Toshiba International Corporation Uninterruptible Power Systems

BATTERY	DC Voltage	72V
	Backup Time	5 min (full load) 15 min (half load)
	Battery type	Yuasa Flame Retardant Lead Acid 9.0Ah/12V
	Number of batteries	6
	Recharge time	<4 hours to 90%
PHYSICAL	Interface	RS-232, USB Standard, Option Card Interface, Network Transient Protector, External Battery Connectivity
	Line Cord	L5-30P
	Receptacles	Four NEMA 5-15R
	Dimensions W x D x H (inch)	25.0x16.9x3.5
	Ship Dimensions WxDxH (inch)	29.5x21.5x8.11
	Weight (lb)	71.5
	Ship Weight (lb)	82.5
OPTION	External Matching Battery Cabinet	Single - 20 Mins, Double - 40 Mins. Max Two Cabinets. Part #: UT1-BR-0320
	Remote Contact Card	Part #: UT1-RMT-CONTACT
	Network Interface Card	RemotEye II - Part #: RMTI-INT-R4
	Environmental Monitoring Device	Part #: RMTI-EMD-HT
	Frequency Conversion	Software Package Part # DUM0029
ENVIRONMENT	Operating Ambient Temperature	0 ~ 40°C (32 ~ 104°F)
	Recommended Temperature	+15°C ~ 25°C
	Storage Temperature	-15°C ~ 50°C
	Cooling	Forced Air-Cooling
	Humidity	0-95%, Non-Condensing
	Audible Noise	Less than 45db Normal and Battery Modes
	Altitude	11500 ft (3,500 m) above sea level
CONFORMANCE	Regulatory Approvals	FCC Part 15 Class B, UL 1778, ICES-003
WARRANTY		Three years on electronics
		Two years full replacement on battery (See Toshiba warranty policy for full details)

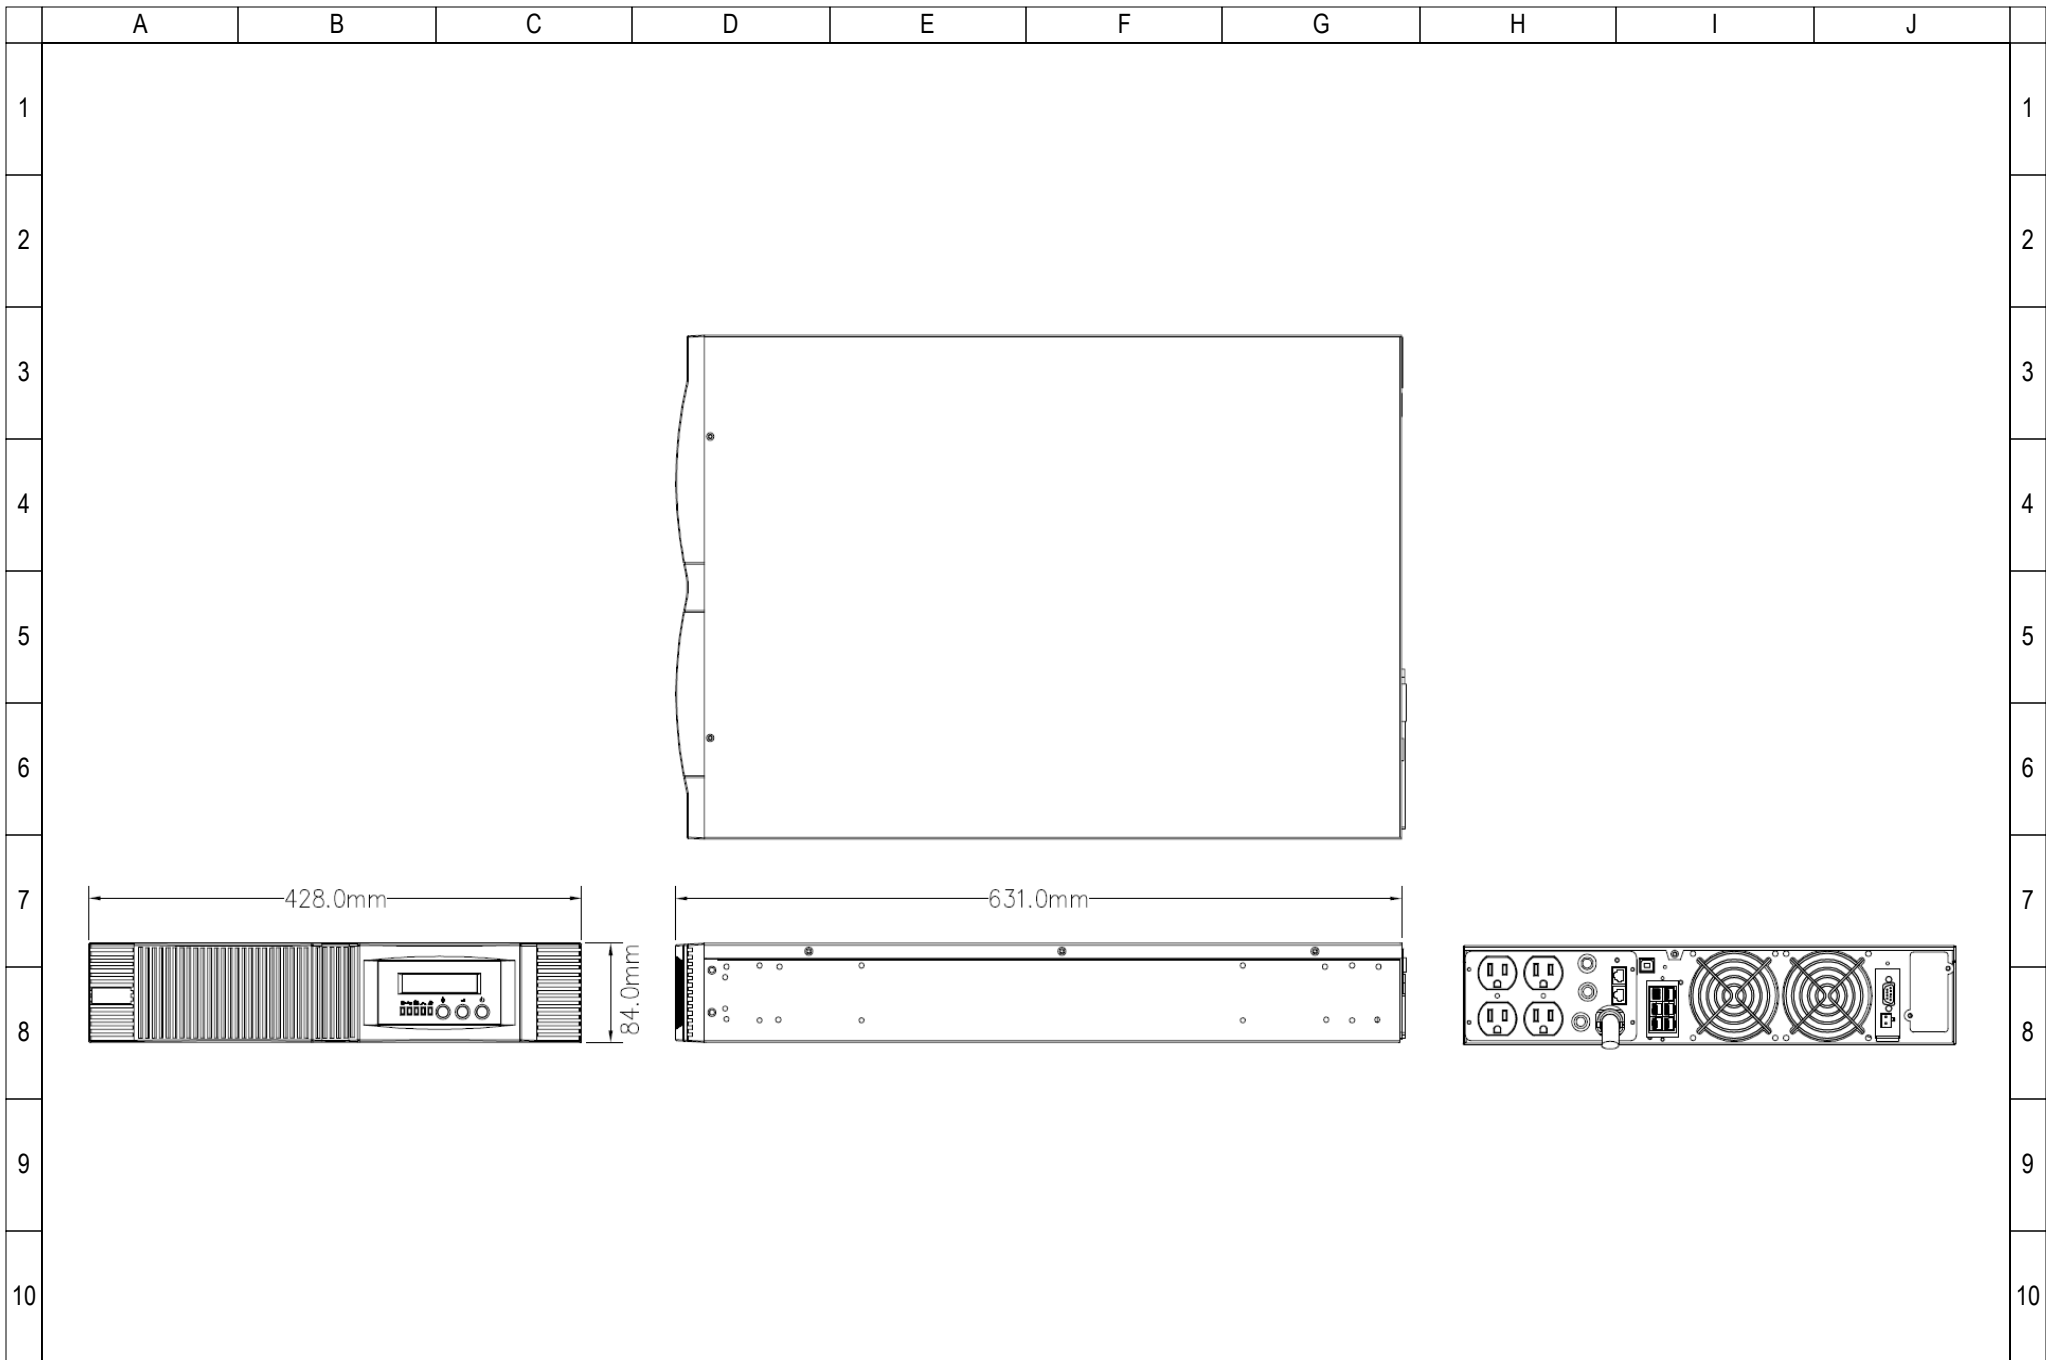

NOTES

1) This drawing is for illustration purposes only and is subject to change without notice. TIC is not responsible for any errors or omissions.

Drawn by
ER
DATE 04/16/12
Approved by
TT
DATE 04/16/12

TOSHIBA


INTERNATIONAL CORPORATION
Houston Texas, USA

THIS MATERIAL IS THE EXCLUSIVE PROPERTY OF TOSHIBA INTERNATIONAL CORPORATION AND SHALL NOT BE REPRODUCED, USED, OR DISCLOSED TO OTHERS UNLESS PRIOR WRITTEN AUTHORIZATION IS OBTAINED.

TITLE
1000 Series Rackmount
3 kVA Model 120V Input
120V Output

DRAWING NO.
UT1A1A030C6RKB2

REV.
1.0

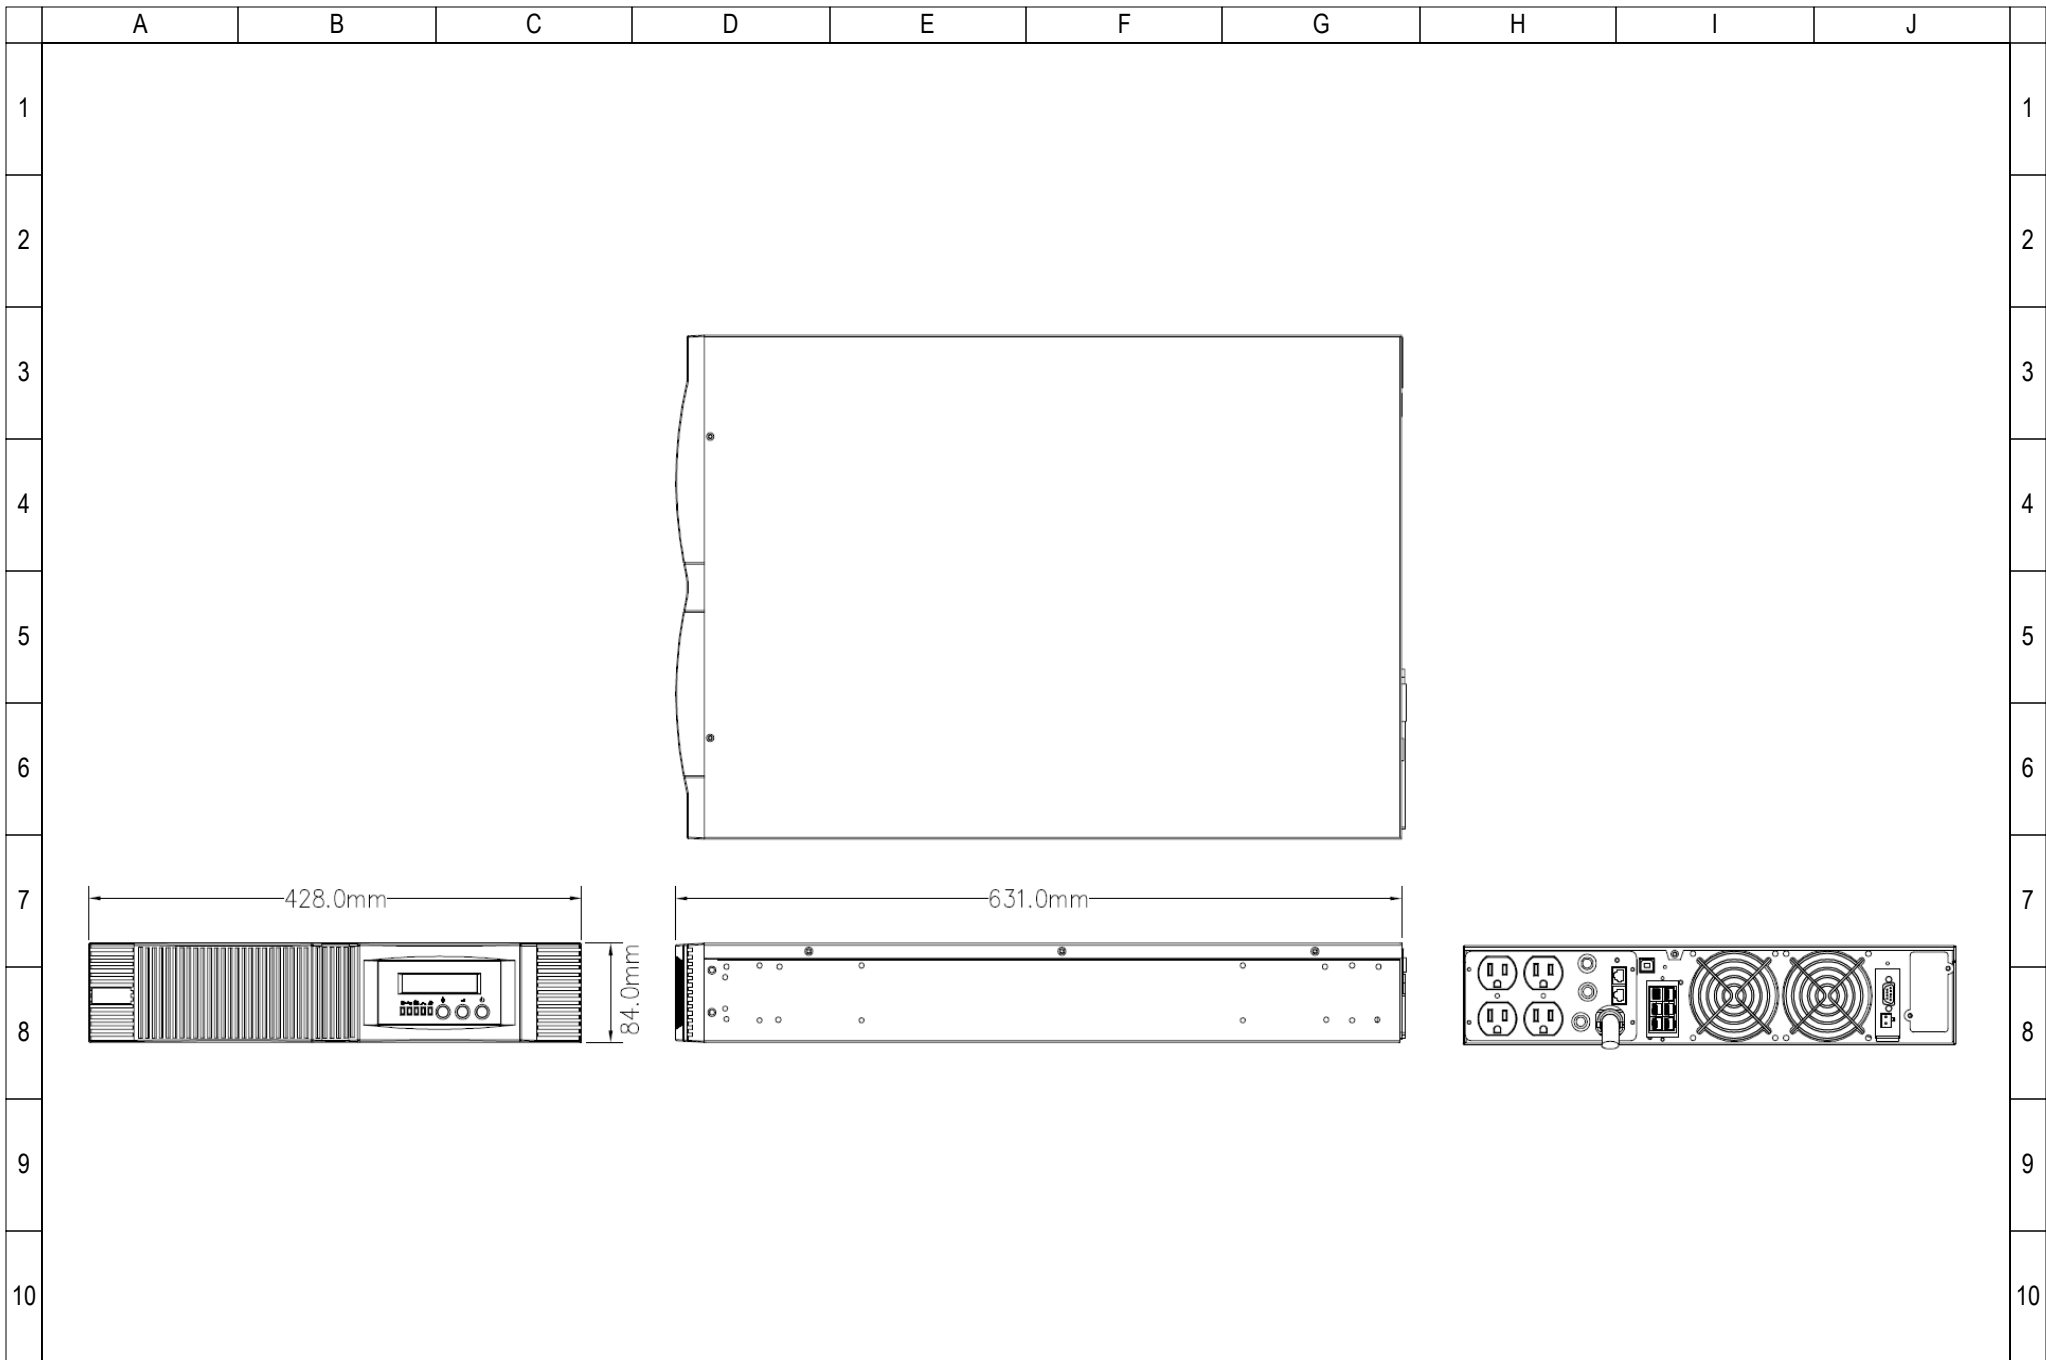

NOTES

1) This drawing is for illustration purposes only and is subject to change without notice. TIC is not responsible for any errors or omissions.

Drawn by
ER
DATE 04/16/12
Approved by
TT
DATE 04/16/12

TOSHIBA


INTERNATIONAL CORPORATION
Houston Texas, USA

THIS MATERIAL IS THE EXCLUSIVE PROPERTY OF TOSHIBA INTERNATIONAL CORPORATION AND SHALL NOT BE REPRODUCED, USED, OR DISCLOSED TO OTHERS UNLESS PRIOR WRITTEN AUTHORIZATION IS OBTAINED.

TITLE
1000 Series Rackmount
3 kVA Model 120V Input
120V Output

DRAWING NO.
UT1A1A030C6RKB2

REV.
1.0

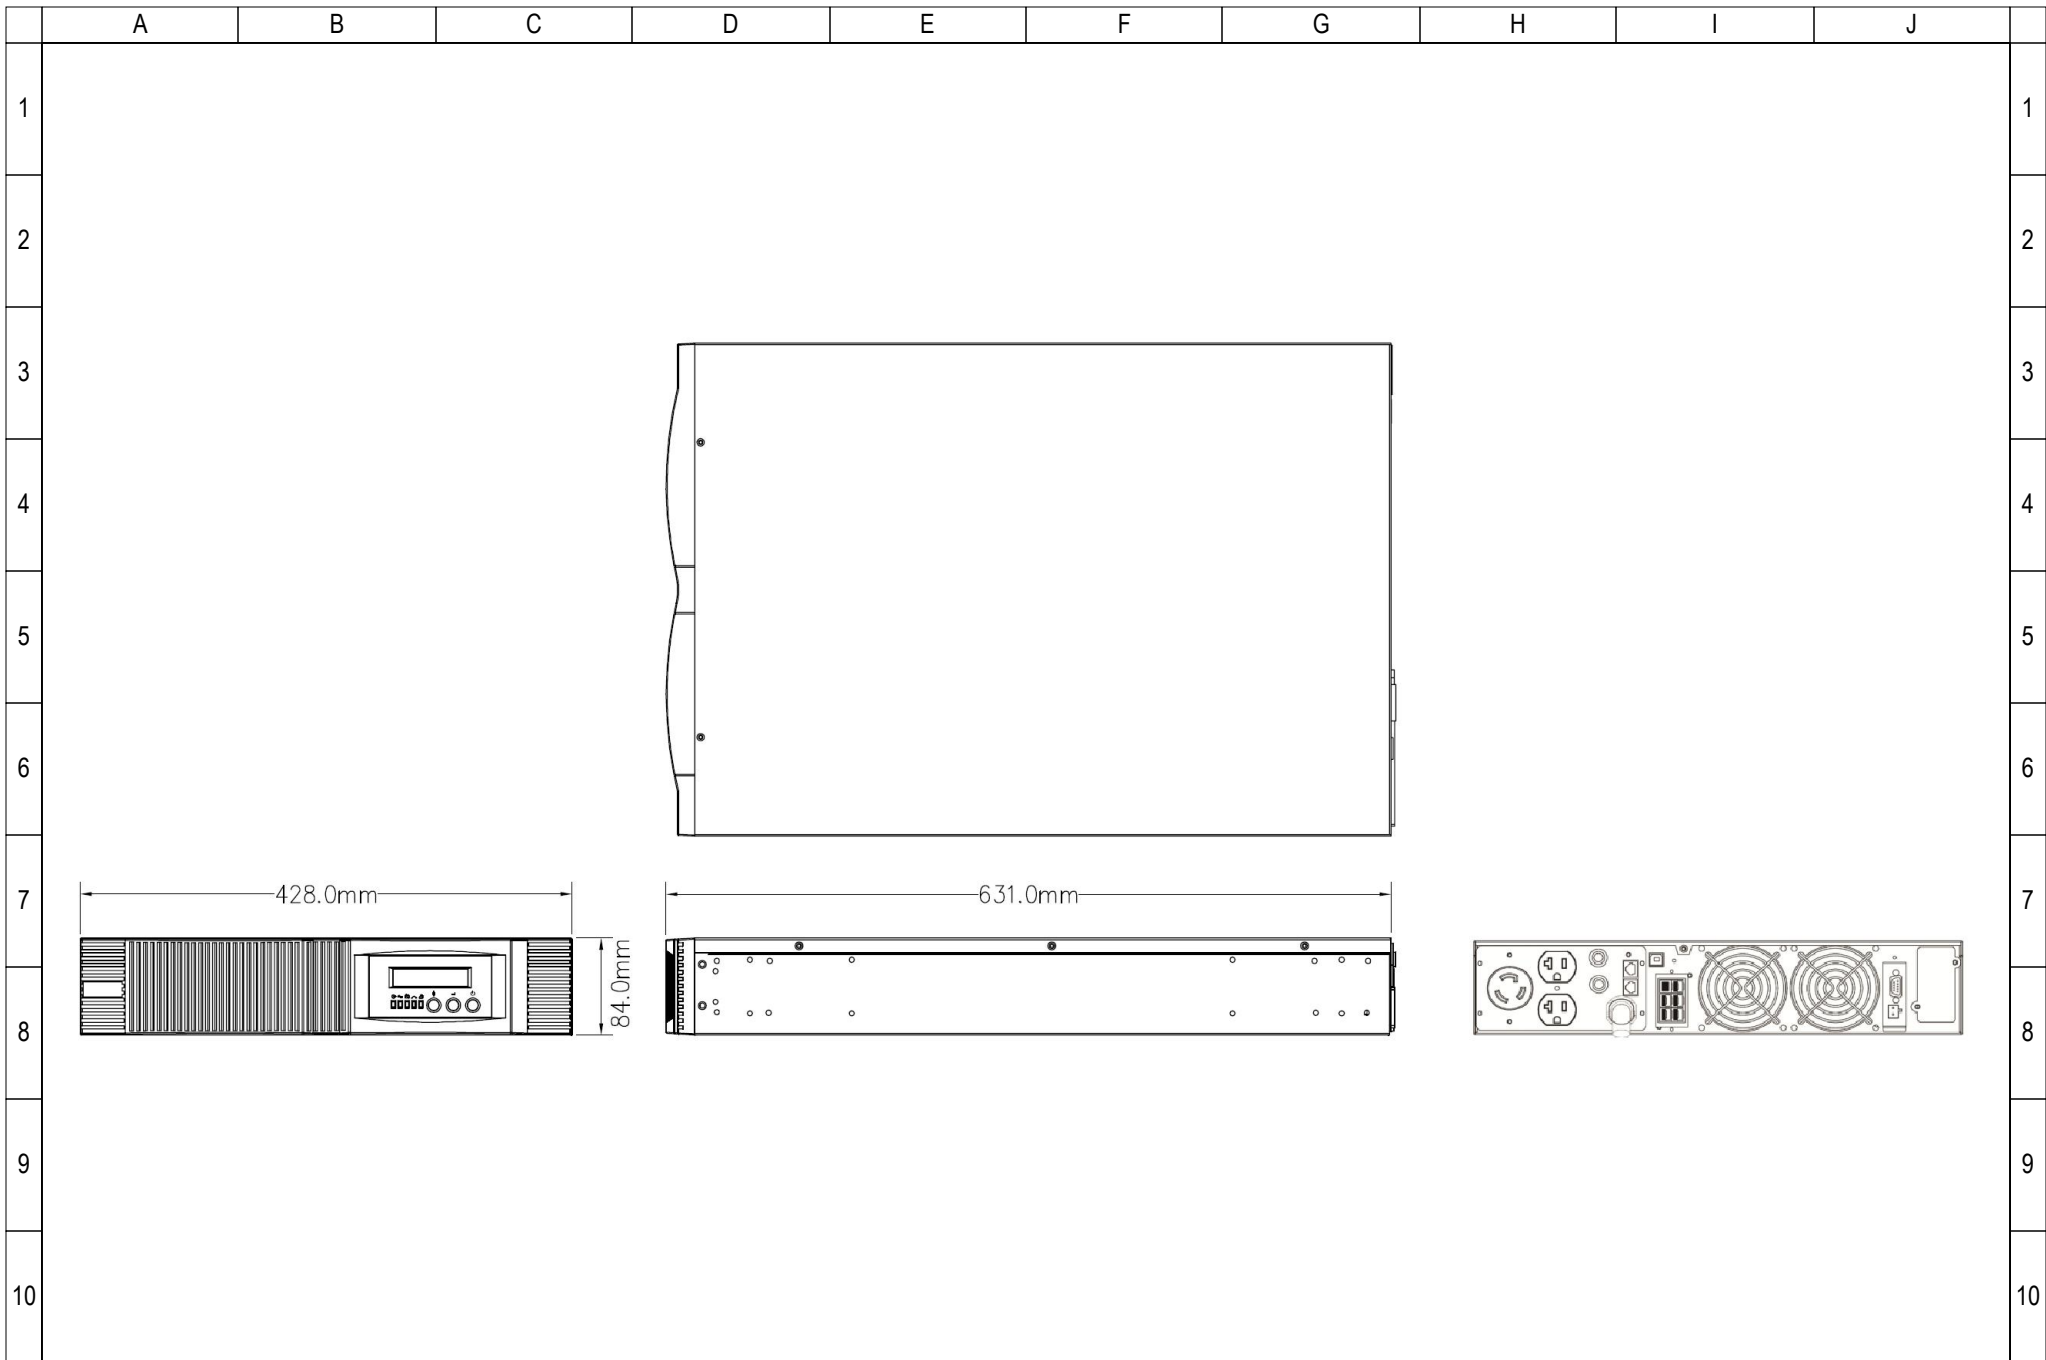

NOTES

1) This drawing is for illustration purposes only and is subject to change without notice. TIC is not responsible for any errors or omissions.

Drawn by
ER
DATE 04/16/12
Approved by
TT
DATE 04/16/12

TOSHIBA
INTERNATIONAL CORPORATION
Houston Texas, USA

THIS MATERIAL IS THE EXCLUSIVE PROPERTY OF TOSHIBA INTERNATIONAL CORPORATION AND SHALL NOT BE REPRODUCED, USED, OR DISCLOSED TO OTHERS UNLESS PRIOR WRITTEN AUTHORIZATION IS OBTAINED.

TITLE
1000 Series Rackmount
3 kVA Model 120V Input
120V Output

DRAWING NO.
UT1A1A030C6RKBP1

REV.
1.0